

Product Information

747 FS/NK

Product structure

Backing Synthetic film

Flexibility
low
1
5
10
15
extremely high
▼

Grain Type Aluminium oxide


Coating open

Top Coat stearate special top coat
P 180 – P 2500, 3000

Manufactured Width 152 mm 1430 mm 1650 mm others

Form

Suitable for hand sanding hand held machine sanding machine sanding

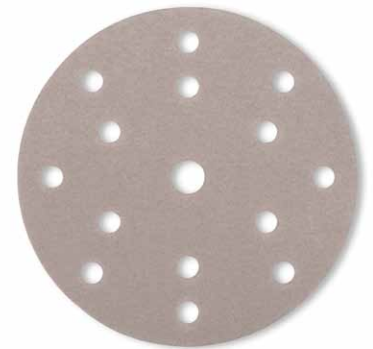

Grits

Ceramic, zirconia, # and * = non P-Grits

P 12 P 16 P 24 P 30 P 36 P 40 P 50 P 60 P 80 P 100 P 120 P 150 P 180 P 220 P 240
 P 280 P 320 P 360 P 400 P 500 P 600 P 800 P 1000 P 1200 P 1500 P 2000 P 2500 3000 5000 7000

Materials

Aluminium Non-ferrous metal Stainless steel Steel Titanium Paint lacquer Glass Wood Plastics Stone/china

Application examples



Car body crash repair



Wind turbine blades



Steel sheet surface finishing

Advantages in sanding

- Low surface roughnesses ensure perfect coating
- High-quality abrasive grain for high stock removal rate
- Long service life thanks to innovative anti-loading system (from P 180)
- No edge shelling due to the strong film backing

